


# EGA

*perfil*

amixalan

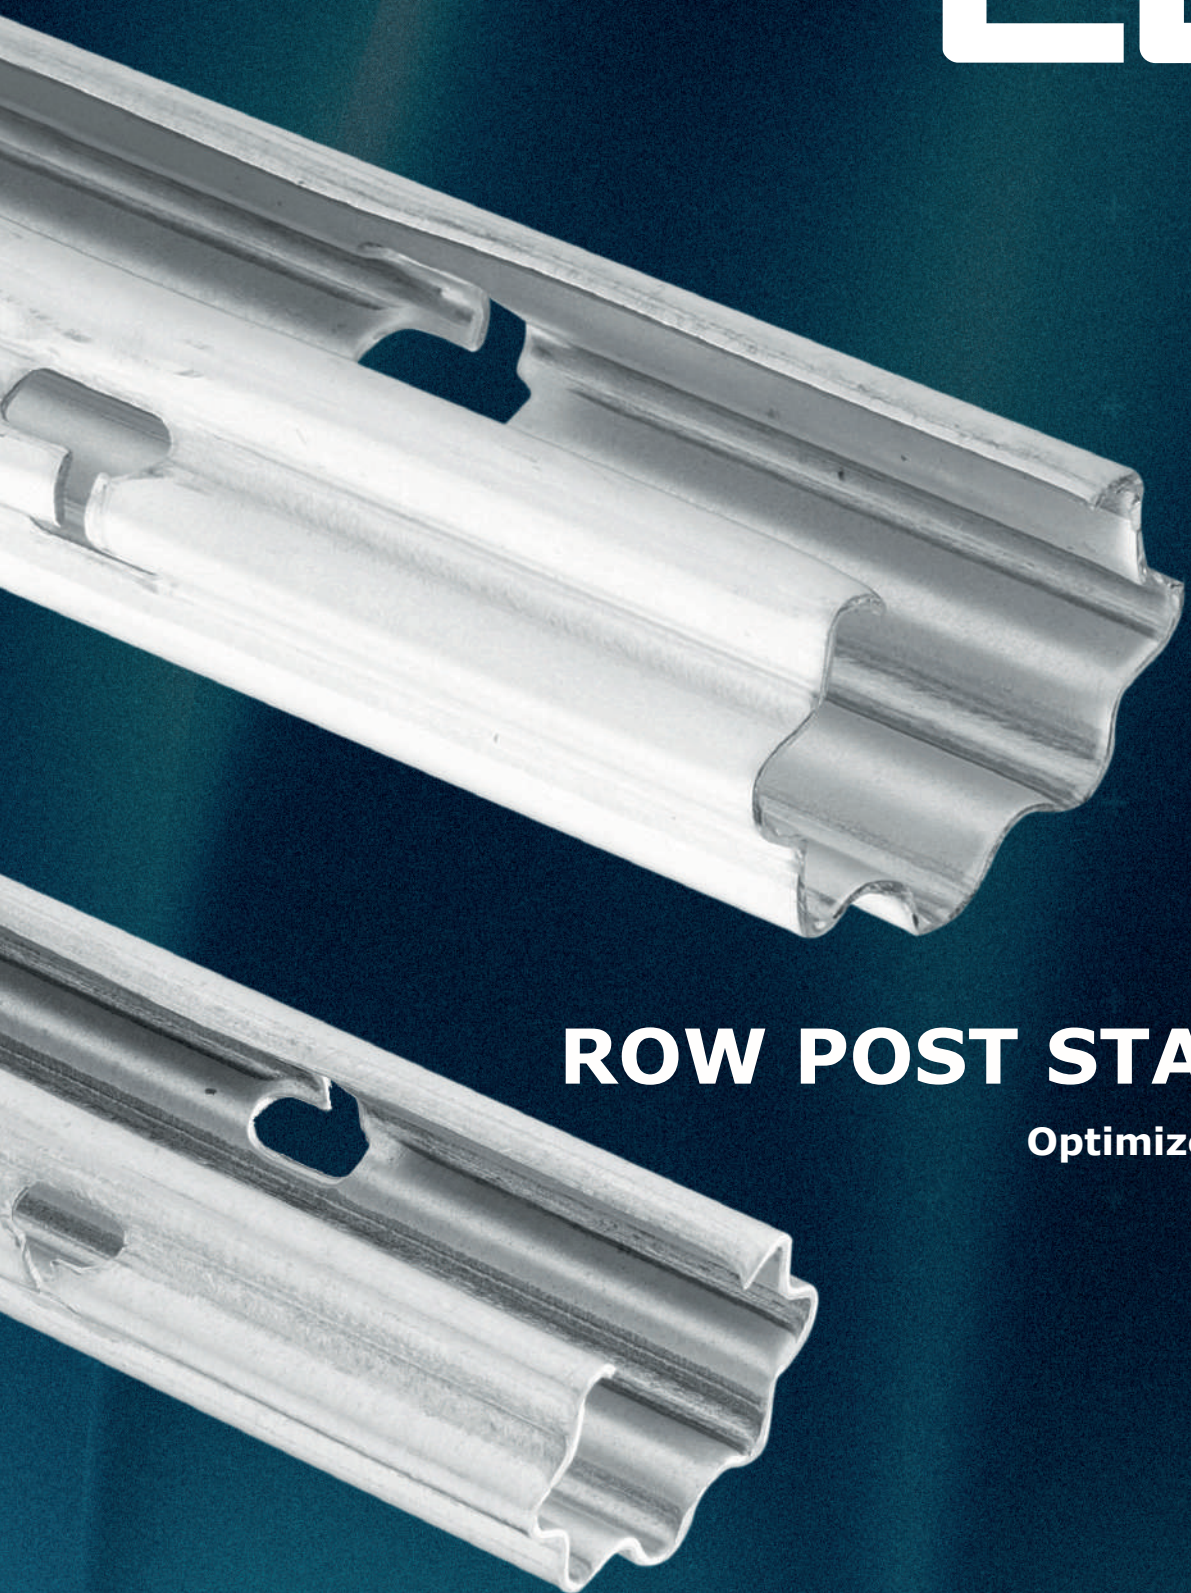


## ROW POST STANDARD

Optimized quality/price  
in a row post

AVDA. DE LOS CASTAÑOS, Nº 15 · POL. IND.  
SAN MIGUEL 31132 · VILLATUERTA (NAVARRA)  
T. (+34) 948 32 16 20 F. (+34) 948 32 16 21  
info.ega@egaperfil.com  
[www.egaperfil.com](http://www.egaperfil.com)

# ROW POST STANDARD

Optimized quality/price  
in a row post



**Standard lengths (mm): 2200 / 2000 and 1800.**  
The desired length can be produced on demand.

## GENERAL SPECIFICATIONS:

Our posts have mix notches (parallel above and alternate below) for greater versatility and resistance.

If it's required we produce different types of notches: parallel, alternate, central drill, horizontal notches (H), automatic revail (RA) or a combination of some of them.

The posts are marked with the year when they are manufactured.

The posts are totally prepared for integrated mechanization (harvest, cutting, etc.) according to the chosen post.

Depending of the type of terrain and instalation, it's advisable to nail between 1/3 or 1/4 of the total length.

According to the especification of the vineyard, the distance between row posts could go from 4 to 6 meters.

## DESCRIPTION

Open shaped 51x32 mm row post. The best price-quality ratio for open shape posts of up to 2m. Perfect mechanical strength and nailing stability. Proper elasticity and torsion, suitable for small to medium production vineyards.

## QUALITY

**TYPE OF STEEL AND COVERING:** DX51D Steel, Z-275 Galvanized, according to the EN-10346:2015.

Possible to manufactured on demand different covering (Magnelis...) or with other special types of steel as "Corten" or raw steel.

**THICKNESS:** 1,50 mm.

## CROSS SECTION

**A (width) mm.** 51

**B (height) mm.** 32

**Weight per linear meter (kg./ml.):** e= 1,5 mm. / 1,283

**Length tolerance (+/- mm):** 3,000

**Section tolerance (+/- mm):** 1,000

**Inertias (e=1,80 mm.):** I1 (vertical) mm<sup>4</sup>: 49.570

I2 (horizontal) mm<sup>4</sup>: 16.910

## DESIGN AND PACKAGING

**Type of notch:** Noch N and on demand H and RA.

**Quantity of notches per length:**

**Length (mm)**                      **Units**

1800                                      9

2000                                      9

2200                                      12

**Units per package:** 200 uts.

**Units per full truck**

**Length (mm)**                      **Units**    e=1,50 mm.

1800                                      10800

2000                                      9700

2200                                      8800